



# SCAN DENALI: NORSEMAN II SERIES

1500HP - AC, 7500PSI, Walking Capable



## HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

**Drawworks:** OWI 1600 AC  
**Rotary Table:** 27.5"  
**Traveling Block:** 500 Ton  
**Top Drive:** Canrig 1250 AC  
**Iron Roughneck:** Canrig TM-80  
**Hydraulic Catwalk:** Canrig  
**Static Hook Load:** 1,000,000#

## MAST & SUBSTRUCTURE

**Mast Design:** Spindletop  
**Mast Height:** 142'  
**Racking Capacity:** 24,000' of 5" Drill Pipe Floor  
**Height:** 28' / **Rotary Beam Clearance:** 27'

## TRANSPORT

**Estimated Loads:** 55 loads (without drill pipe)

## POWER PACKAGE

**Engines:** Three (3) Caterpillar 3512C Diesel Engines  
**Generators:** Three (3) 1365 Kw Kato Generators  
**AC System:** IED


## BOP EQUIPMENT

**Annular:** 13-5/8" 5K  
**Double Ram:** 13-5/8" 5K  
**Accumulator:** 6 Station  
**Choke Manifold:** 5K  
**Mud/Gas Separator:** Shop Built

## MUD SYSTEM

**Mud Pumps:** Two (2) F1600 with 7500 psi Fluid Ends  
**Liquid Mud Tanks:** Two (2) with 1000 bbl  
**Total Capacity Trip Tank:** 100bbl  
**Shale Shakers:** Three (3) Swaco Mongoose

Location Plat

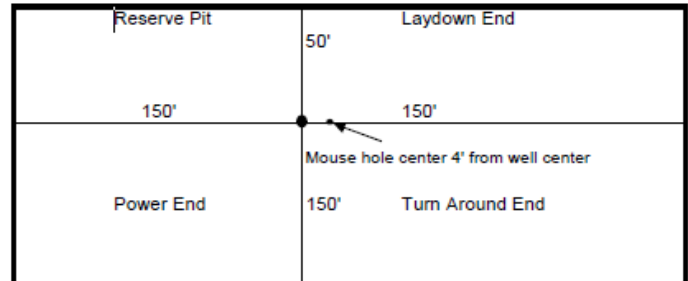

## TUBULARS

**Drill Pipe:** 5" Drill Pipe as Needed  
**Drill Collars:** As needed per Customer's Well Program

## PAD DRILLING (MULTI DIRECTIONAL)

**Walking System/Type:** Spindletop (Stomper Type)  
**Pad Walking Distance:** 0' to 100'